

Truck and wagon loading





FLSmidth Ventomatic SpA offers a complete range of products and solutions for manual loading of bagged products into trucks and rail wagons.

As one of the market pioneers in the field of manual and automatic loading, we take care of the complete process from design, production, installation and service. Our state of the art R&D department, as well as our versatile manufacturing locations guarantee a solution for all your logistical needs. Our experienced design office will provide

you with customized design details to ensure a seamless interface between our products and the site arrangement. No matter what your loading requirements are, we take care of your cement, fertilizers and dry mix bags till they are quickly and efficiently loaded to be delivered to your final customers.


Loading for TRUCKS

TLM™ 1016

Main features

- Platform type machine;
- Suitable to load bags on truck or containers from rear side.

The feed conveyor is moving on rails on the platform, the loading conveyor, connected with the upper part to feed conveyor, has a motorised and manual swelling movement.

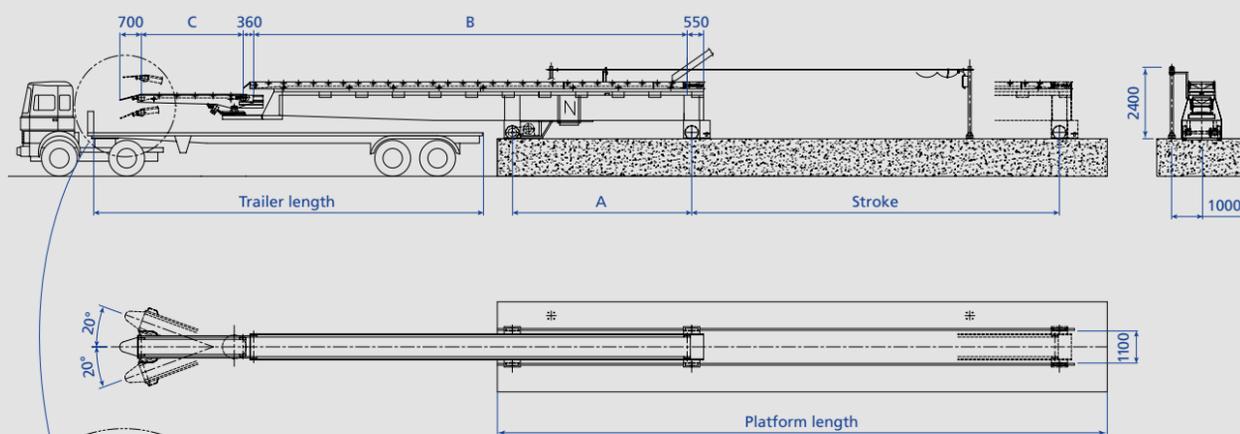

Dimensions									
Stroke	Trailer length	Rail length	Platform length	A	B	C	D	E	F
6000	6700	2 x 11000	11000	4000	7000	2700	1100	430	430
9000	9700	2 x 15000	15000	5000	11000	2700	1100	430	430
12300	13000	2 x 19500	19500	6000	14500	3400	1285	630	515
15300	14200	2 x 25000	25000	7000	19000	3400	1285	715	550

Indicative drawing only




Loading for TRUCKS

CTA™

Main features


- Platform type machine;
- Suitable to load bags on open truck or trailer from rear side;
- Fast positioning of the empty trucks.

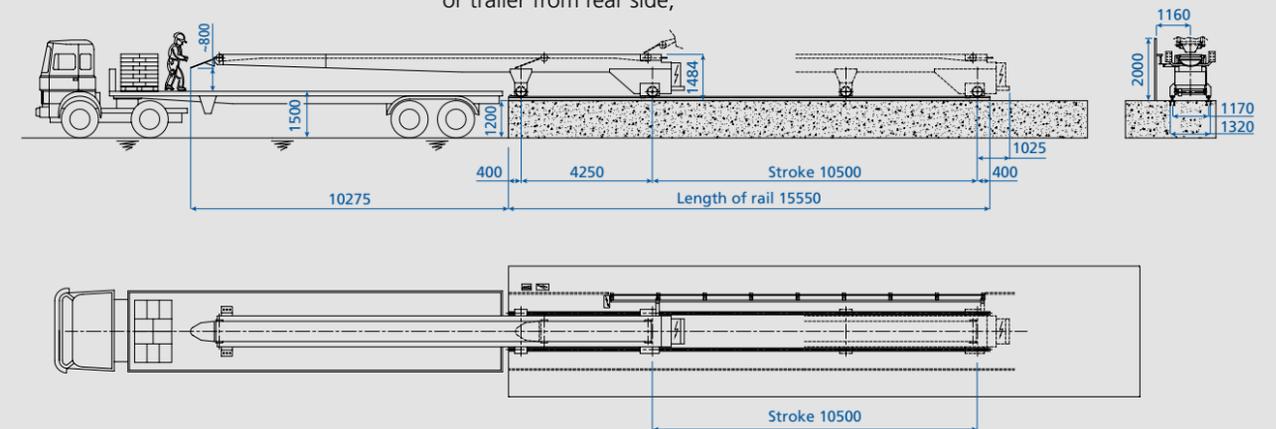

CDA™ 1020

Main features

- Hanging type machine;
- Suitable to load bags on trucks or containers from rear (truck platform length up to 13 meters).

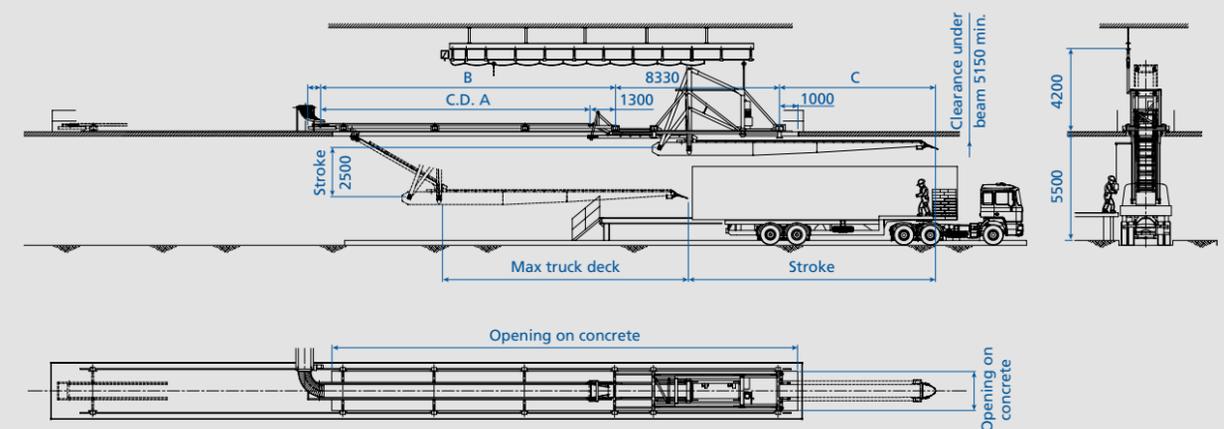

Dimensions					
Stroke	A	B	Max truck deck	C	Opening on concrete
10800	12005	13300	12000	6380	22250 x 2000
12500	13505	14800	13500	8130	23750 x 2000


Indicative drawing only

CDA™ 9

Main features

- Hanging type machine;
- Suitable to load bags on open truck

or trailer from rear (truck platform length up to 13 meters).

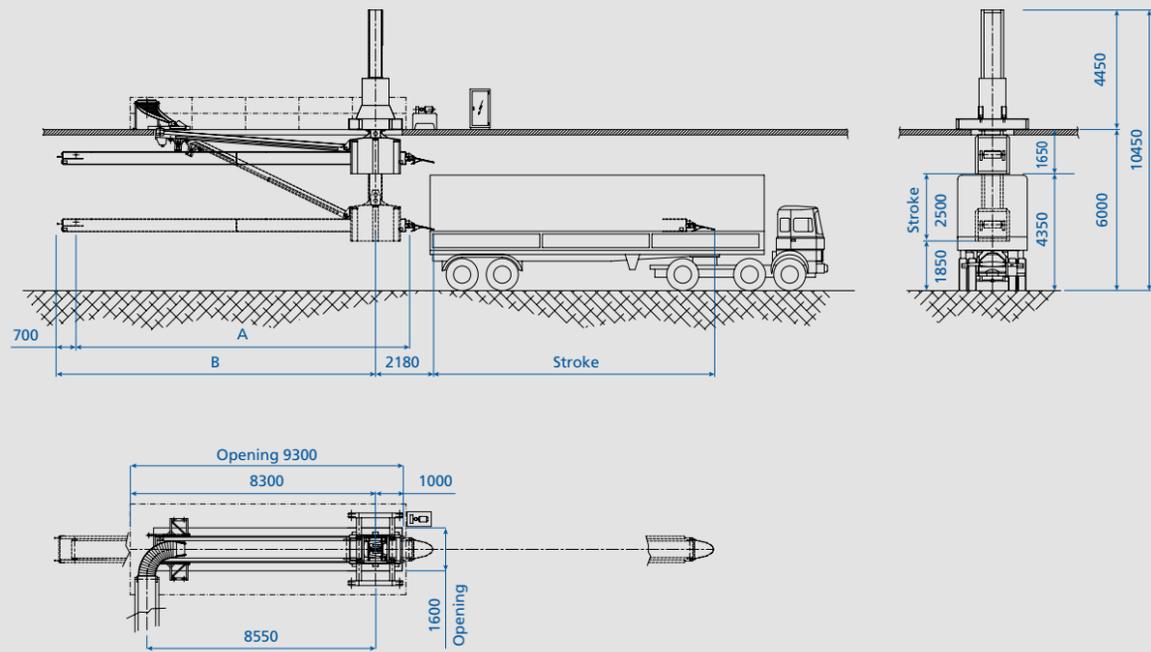

Loading Stroke	7200	8500	10500	11500	12500
A	9200	10500	12450	13500	14500
B	8350	9900	11900	12950	13950

Indicative drawing only




BSA3™

Main features

Length of the truck platform:
from 10500 to 15000 mm

- Hanging type machine;
- Suitable to load bags on open truck or trailer from top side;

- Fast positioning of the empty trucks.

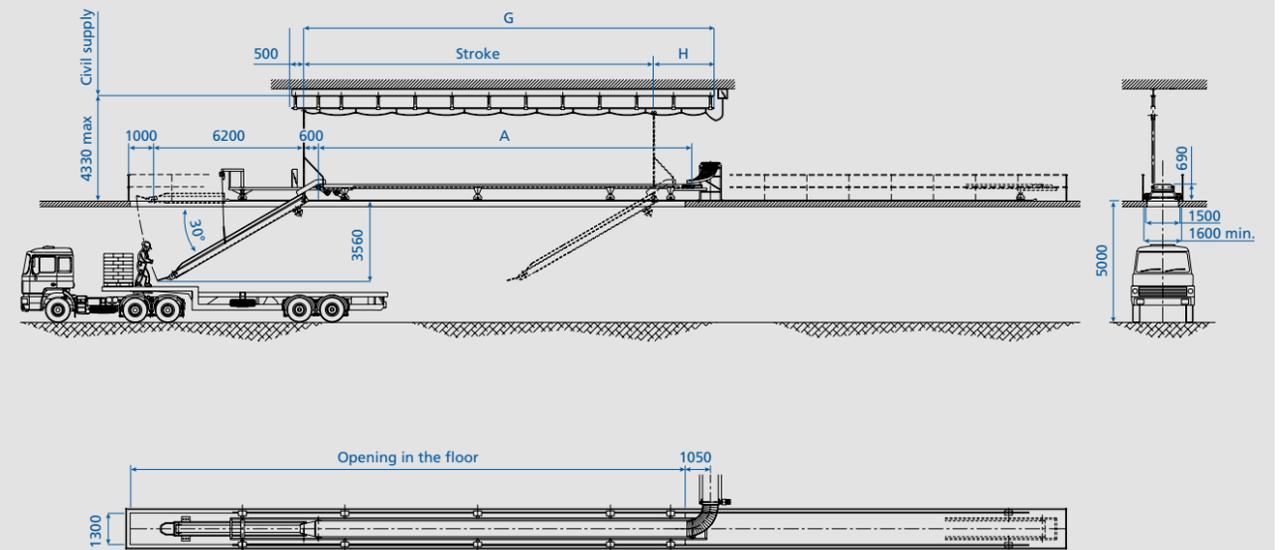

Stroke	G	H	Opening in the floor
10000	15000	4500	18500 x 1300
11000	15000	3500	19500 x 1300
12000	15000	2500	20500 x 1300
13000	15000	1500	21500 x 1300
14500	17500	2500	23500 x 1300


Indicative drawing only



GTL™

Main features

- Platform type machine;
- Suitable to load bags on trucks or containers from lateral side.

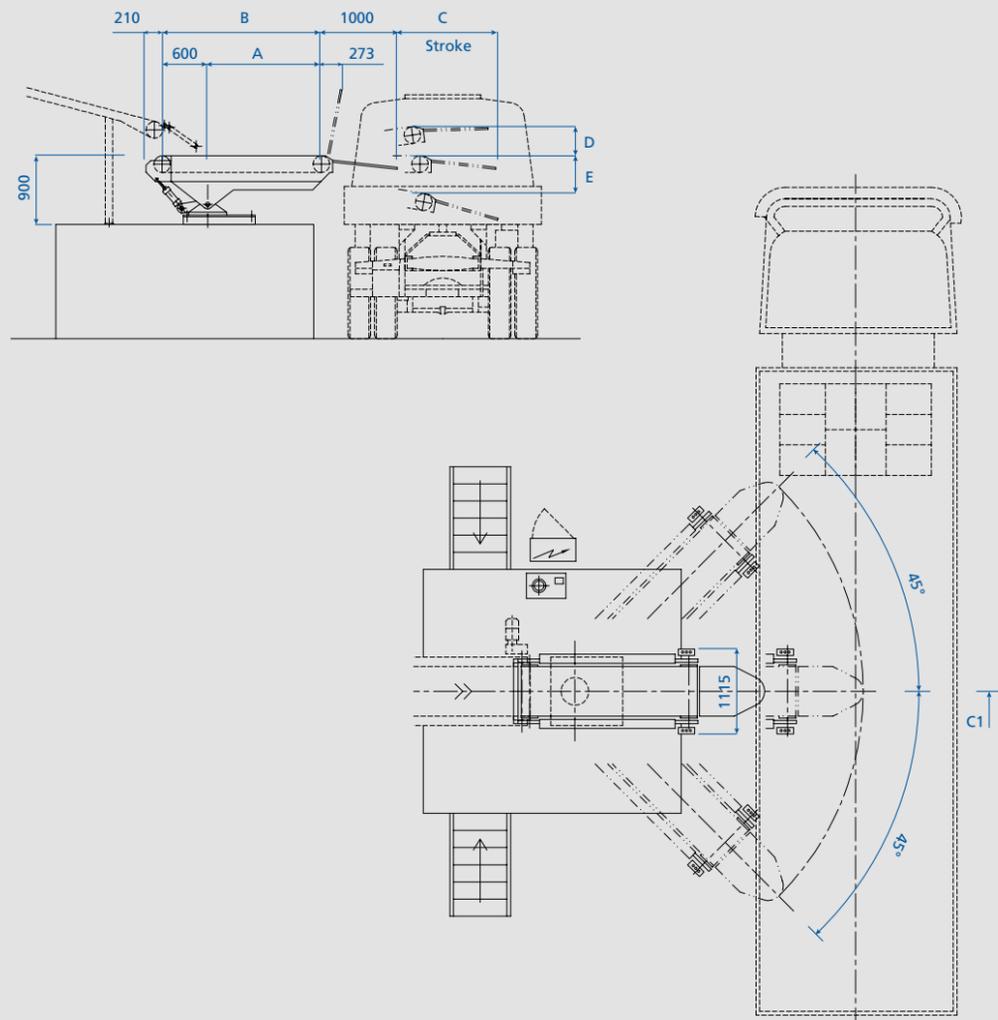

A	B	C	D	D
1500	2100	1300	300	550
2100	2700	1800	460	900
1640	2240	2500	885	600

Indicative drawing only




Loading for WAGONS

WLM™ 2050

Main features

- Suitable to load closed wagon (double door type) on both sides of the wagon loading bay;
- Suitable to load open top wagon on one side of wagon loading bay.

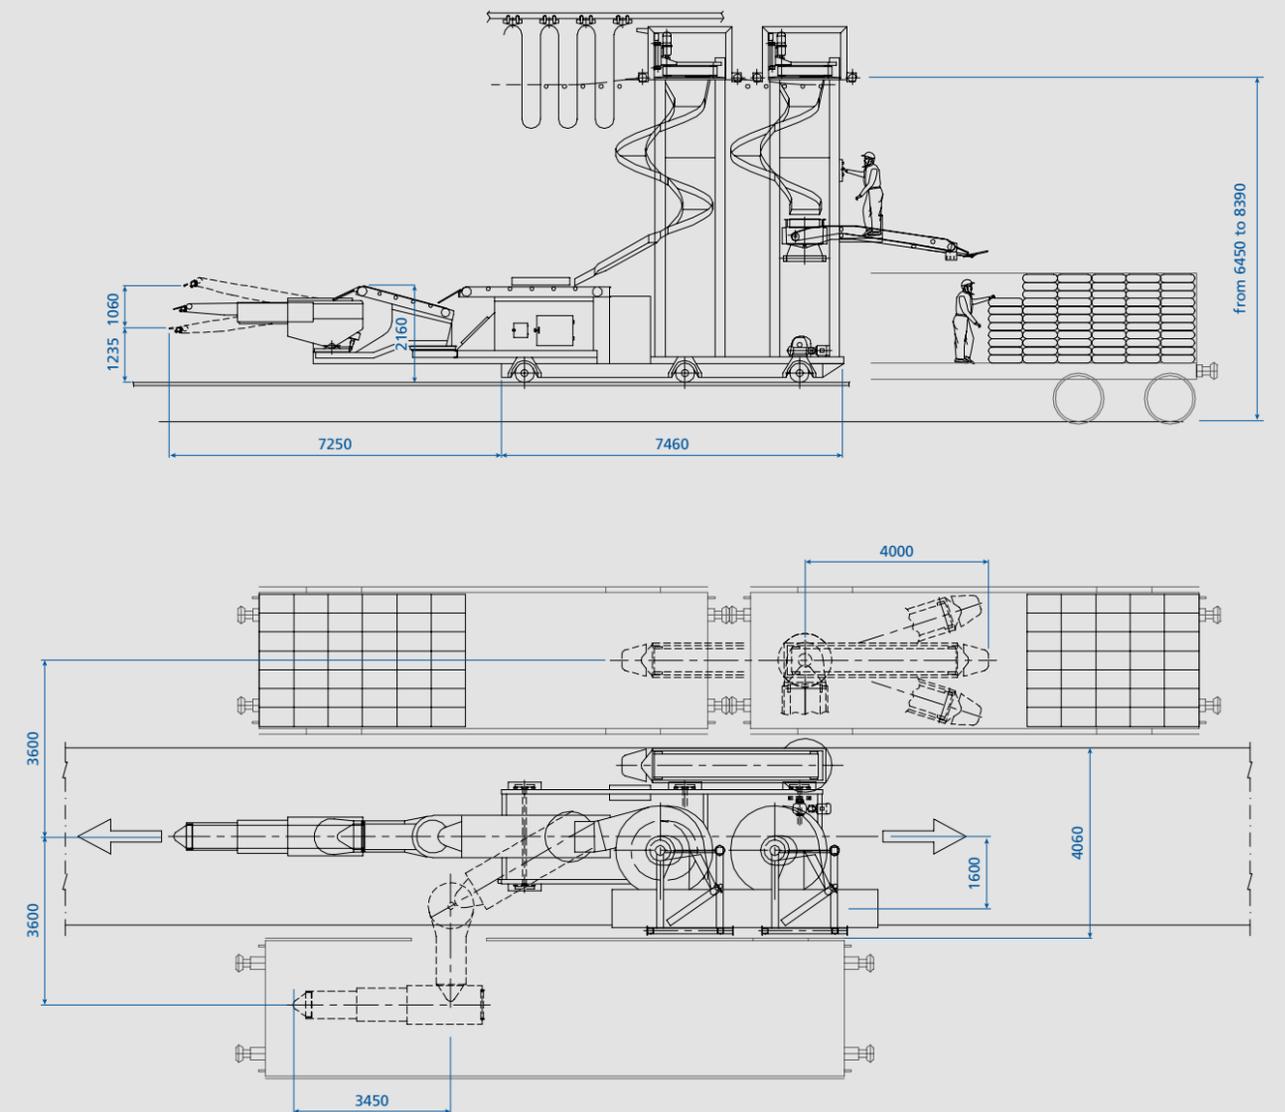


Indicative drawing only

WLM™ 2026

Main features

- Suitable to load closed wagon (double door type) on the both sides of the wagon loading platform.

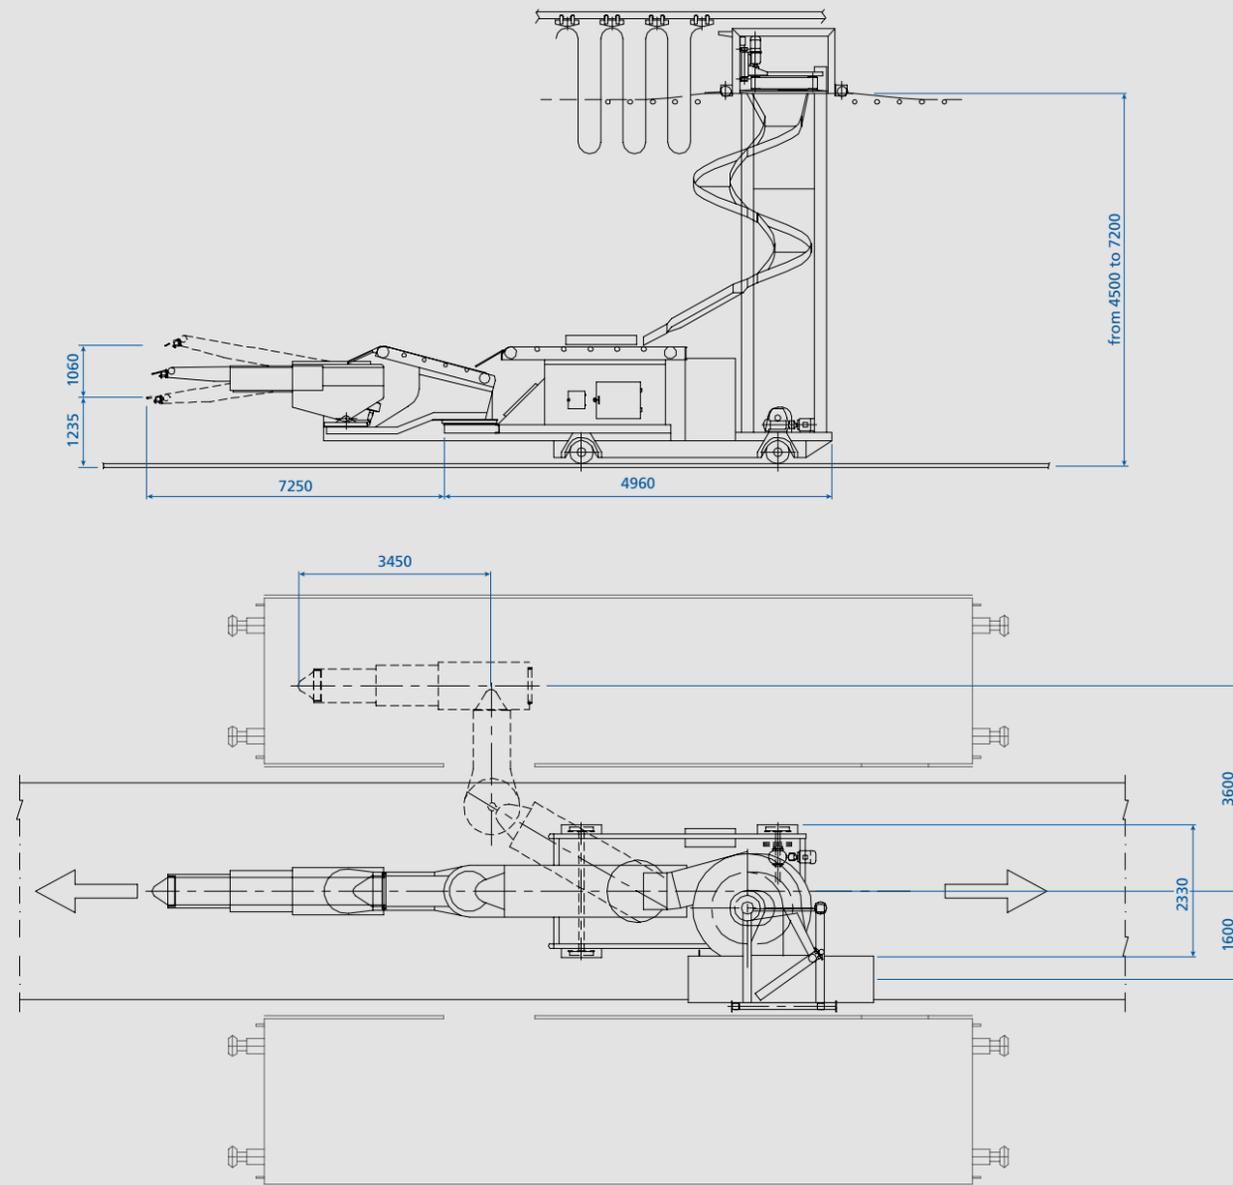


Indicative drawing only

WLM™ 2028

Main features

- Suitable to load closed wagon (**double door type**) on one side of the wagon loading bay.

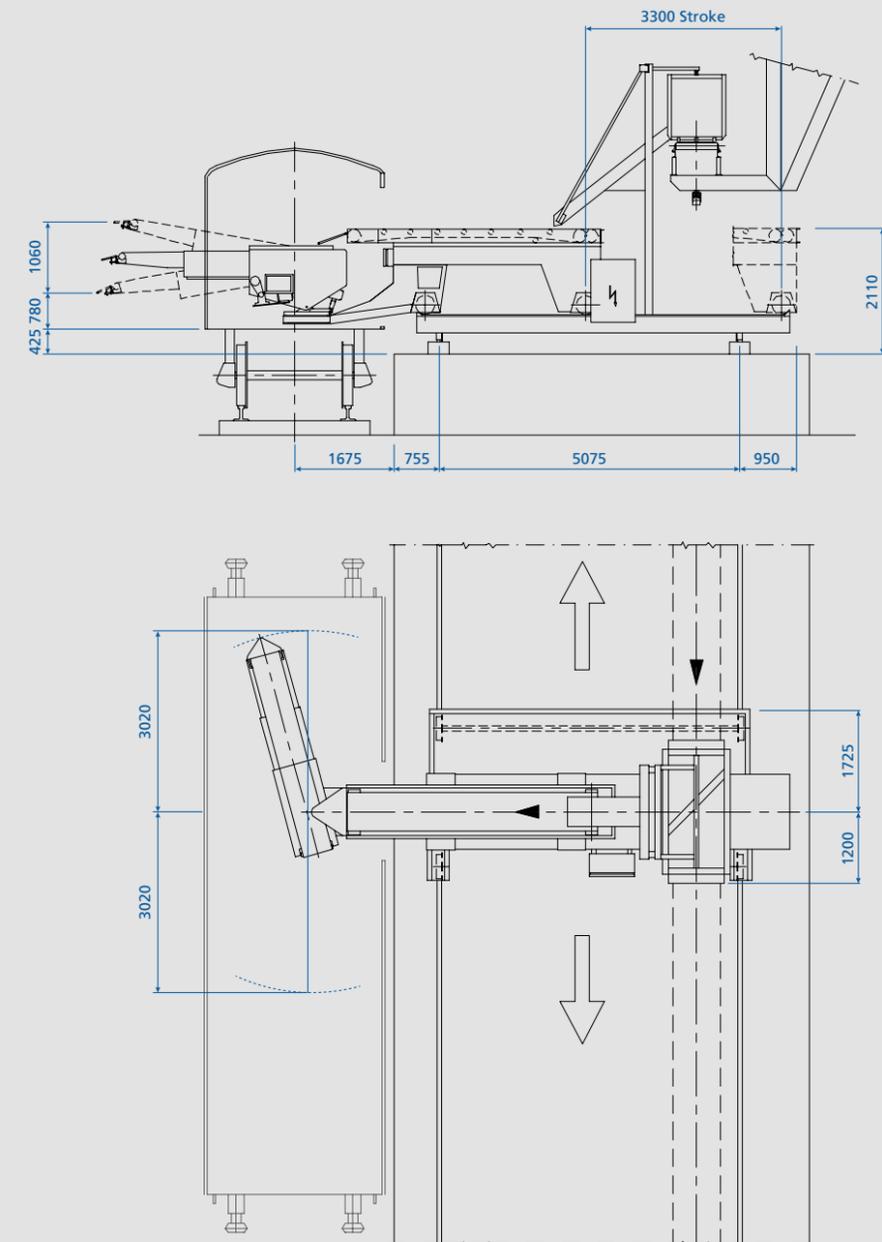


Indicative drawing only

WLM™ 2029

Main features


- Suitable to load closed wagon (single door type) on one side of the wagon loading bay;
- Suitable for wagon up to 13 mt.

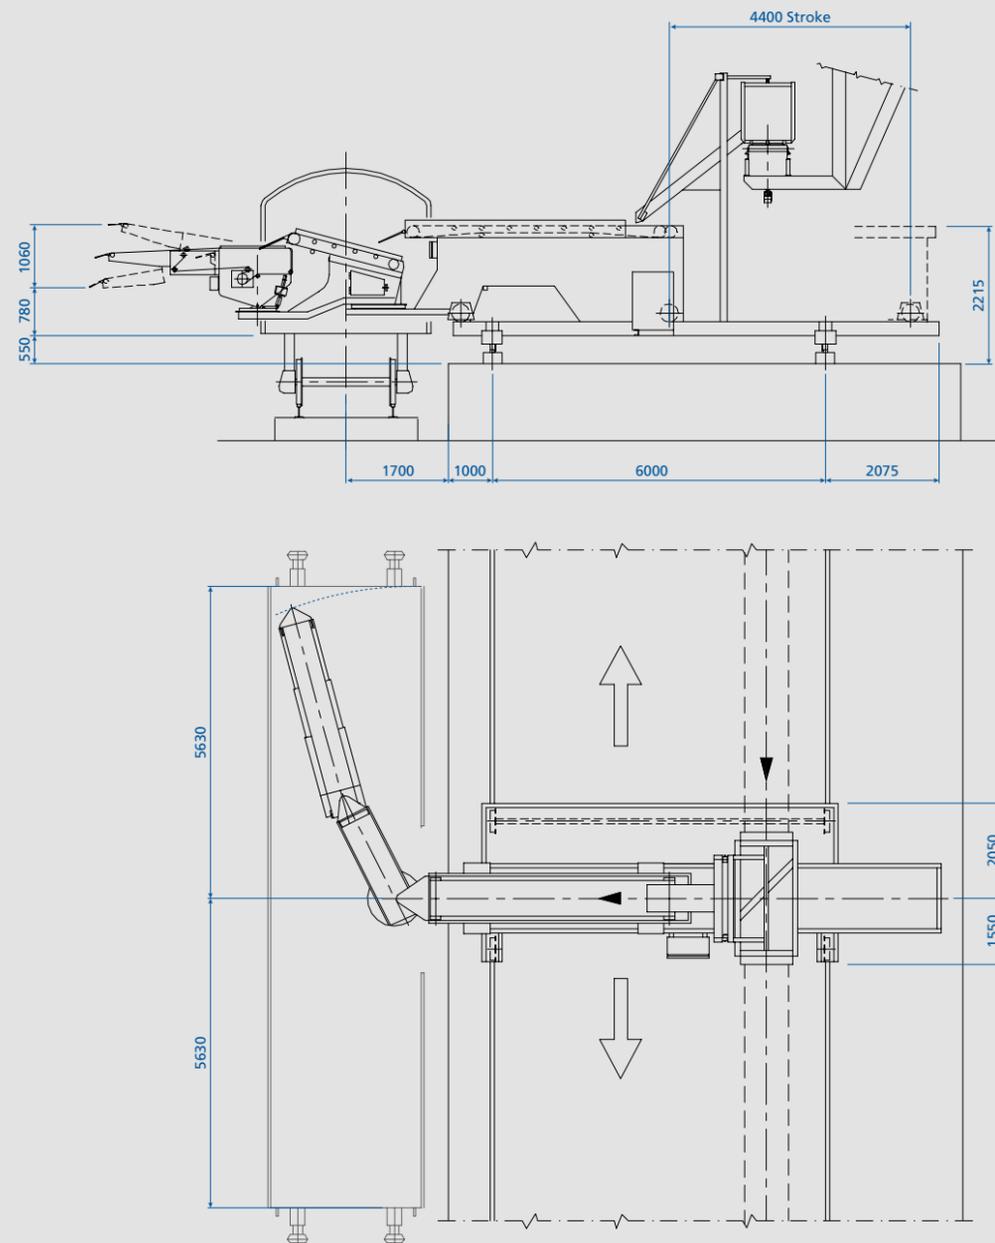

CB8™ M

Main features

- Suitable to load closed wagon (single door type) on one side of the wagon loading bay;
- Suitable for wagon up to 16 mt.

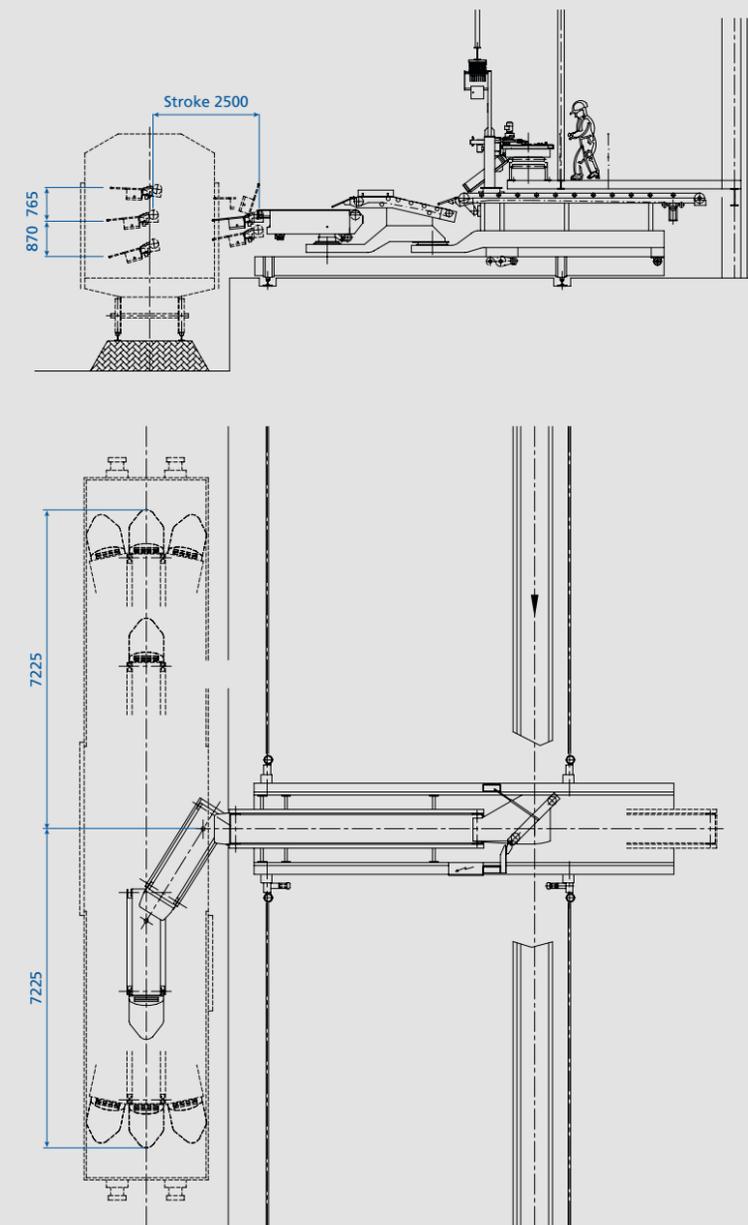



Copyright © 2013 FLSmidth AIS. ALL RIGHTS RESERVED. FLSmidth, VENTOMATIC are (registered) trademark of FLSmidth AIS. This brochure makes no offers, representations or warranties (express or implied), and information and data contained in this brochure are for general reference only and may change at any time.

www.flsmidthventomatic.com

FLSmidth Ventomatic S.p.A

via G. Marconi, 20
24030 Valbrembo (Bergamo) Italy
tel. +39 035 468 311
fax +39 035 460 838
vento@flsmidthventomatic.com

FLSmidth Private Limited

Express Trade Tower 3, 1st & 2nd Floor, Plot No.79,
Hero Honda Chowk, Sector-34,
Gurgaon-122001 Haryana India
tel. +91 124 308700
ventoin@flsmidthventomatic.com

FLSMIDTH
VENTOMATIC